


HOLEX

**HOLEX Pro Steel solid carbide drill, Whistle-Notch shank DIN 6535 HE, TiAlN,
Ø DC h7: 6,35 mm or inch**

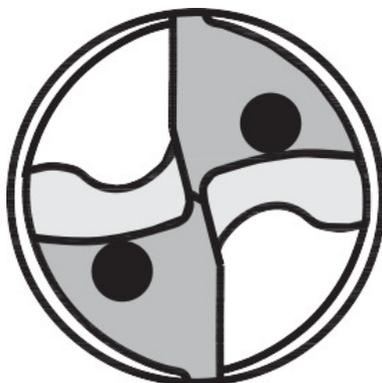

Order data

Order number	122778 6,35
GTIN	4062406127060
Item class	12F

Description

Version:

HOLEX Pro Steel:

Straight major cutting edges and a **special flute profile** ensure good chip evacuation. The robust cutting edge geometry ensures high-performance drilling with good process reliability. A wide range of applications in steel materials thanks to a combination of tough ultra-fine grain carbide and extremely wear-resistant coating.

Recommendation:

Maximum drilling depth:

clamping slot length (see table) less 1.5×nominal Ø.

Note:

Flute length $L_c = L_2 + 1.5 \times D_c$.

Machining strategy: HPC

Standard: DIN 6537

Tolerance nominal Ø: h7

Number of cutting edges Z: 2

Tolerance nominal Ø: h7

recommended maximum drilling depth L_2 : 43.475 mm

Overall length L: 91 mm

Shank $\varnothing D_s$: 8 mm

Feed f in steel $< 900 \text{ N/mm}^2$: 0.18 mm/rev.

Technical description

Flute length L_c	53 mm
Overall length L	91 mm
Shank $\varnothing D_s$	8 mm
Number of cutting edges Z	2
Standard	DIN 6537
Nominal $\varnothing D_c$	6.35 mm
Feed f in steel $< 900 \text{ N/mm}^2$	0.18 mm/rev.
Tolerance nominal \varnothing	h7
recommended maximum drilling depth L_2	43.475 mm
Series	HOLEX Pro Steel
Coating	TiAlN
Tool material	Solid carbide
Drill depth up to	6×D
Point angle	140 degrees
Shank	DIN 6535 HE to h6
Through-coolant	yes, with 25 bar
Machining strategy	HPC
Colour ring	green
Type of product	Jobber drill