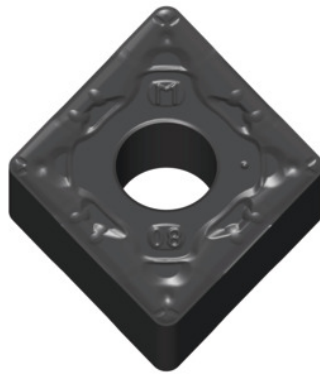


Garant
CN.G 09T304, Grade: HB7210-1


Order data

Order number	250150 HB7210-1
GTIN	4062406058869
Item class	21G

Description

CN.G 09T304 HB7210-1 Grade: HB7210-1
 Chip breaker: GM
 Tolerance: M
 Cutting depth a_p : 0.4 - 6.5 mm
 Feed f : 0.3 - 0.7 mm/rev.
 Cutting speed v_c main application: 100 - 450 m/min

Technical description

Grade	HB7210-1
Chip breaker	GM
Feed f	0.3 - 0.7 mm/rev.
Cutting speed v_c main application	100 - 450 m/min
Cutting depth a_p	0.4 - 6.5 mm
Corner radius	0.4 mm
Cutting conditions	slightly interrupted

Main application	K
Tool material	Carbide
Finishing/roughing assignment	Skrubbearbejdning-sletbearbejdning
Coating	TiCN
ISO code indexable insert	CNMG 09T304
Number of changes/inserts	4
Tolerance	M
Type of product	Indexable insert for turning