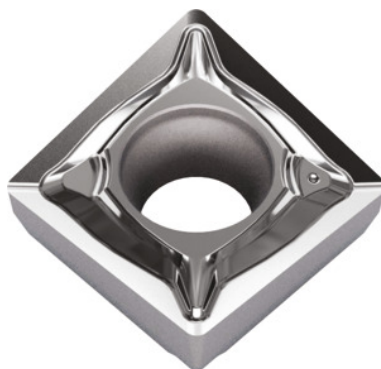


Garant**ZCMX 10T304, Grade: HUZ310****Order data**

Order number	268433 HUZ310
GTIN	4062406273040
Item class	21E

Description

ZCMX 10T304 HUZ310 Grade: HUZ310

Cutting depth a_p : 0.2 - 4 mm

Feed rate when turning: 0.05 - 0.4 mm

Feed rate when drilling: 0.03 - 0.3 mm

Cutting speed v_c main application: 200 - 600 m/min**Technical description**

Number of changes/inserts	2
ISO code indexable insert	ZCMX 10T304
Main application	N
Tool material	Carbide
Cutting conditions	continuous
Coating	uncoated
Corner radius	0.4 mm
Cutting depth a_p	0.2 - 4 mm

Grade	HUZ310
Cutting speed v_c main application	200 - 600 m/min
Feed rate when turning	0.05 - 0.4 mm
Feed rate when drilling	0.03 - 0.3 mm
suitable for tool dia. D_c	20 mm
Type of product	Indexable insert for turning