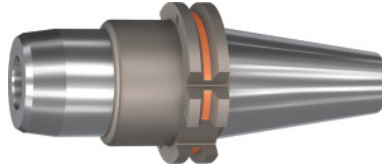


Garant**Hydraulic clamping chuck BASIC short, slim, Form ADB, SK 40, Clamping range Ø D1: 32 mm****Order data**

Order number	302043 32
GTIN	4062406544379
Item class	31A

Description**Version:**

- **Radial run-out $\leq 3 \mu\text{m}$.**
- **With Balluffchip bore.**
- **Axial length adjustment (adjustment 10 mm) available.**
- **Flexible due to the use of reducing sleeves.**
- **Coolant pressure up to 80 bar.**

Application:

For drilling, reaming and finish milling.

Optional extras:

Back stop screws for direct clamping / use of reducing sleeves on request.

Pull studs (PS) No. 308600 – 308806, PS wrenches No. 308810 – 308830, size 12; 20; 32: Sleeve reducer No. 302135 – 302180.

Machining strategy: HSC

Overhang dimension A: 80.5 mm

Ø D₂: 63 mm

External Ø D: 80 mm

Reach L₁: 61.5 mm

L₂: 25.5 mm

Adjustment travel V: 10 mm

Technical description

Overhang dimension A	80.5 mm
----------------------	---------

Clamping $\varnothing D_1$	32 mm
L_2	25.5 mm
Thread M	M16×1
Adjustment travel V	10 mm
External $\varnothing D$	80 mm
$\varnothing D_2$	63 mm
Reach L_1	61.5 mm
Adapter	SK 40
Arbor standard	ISO 7388-1
Shape	ADB
Through-coolant	yes, with max. 80 bar
Balance quality G at rotational speed	G 2.5 at 25,000 rpm
Concentricity	$\leq 3 \mu\text{m}$
Machining strategy	HSC
Type of product	Hydraulic clamping chuck