SCHUNK

Slotted reducing adapter, ⌀ 20 mm, Clamping range ⌀ D1: 16 mm

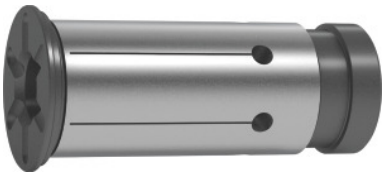

Order data

Order number	302165 16
GTIN	
Item class	33T

Description

Version:
Schunk GZB-S with seal.
Tight against coolant up to 80 bar.
Flexible length pre-setting possible through movable intermediate piece.
Sealed (rubber plug).
Application:
· **For drilling, reaming, milling, and tool sharpening.**
· **Very high flexibility due to reduction in clamping diameter.**
· **High torque guarantees a greater metal removal rate than with direct clamping.**
· **Concentricity ±5 µm (system accuracy at 3×D).**
· **Concentricity ±2 µm (for reducing adapter).**
· **Can be used in all commercially available hydraulic clamping chucks.**
⌀ D: 20 mm

Technical description

⌀ D	20 mm
Clamping ⌀ D_1	16 mm
External ⌀	20 mm
Product name attribute	⌀ 20 mm
Concentricity system	5 µm
Type of product	Hydraulic clamping chuck accessories