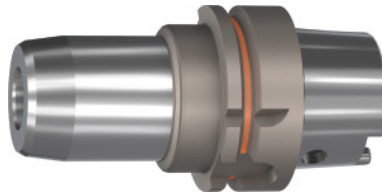


Garant
Hydraulic clamping chuck BASIC short, slim, HSK-A 63, Clamping range \varnothing D1: 32 mm

Order data

Order number	307513 32
GTIN	4062406544492
Item class	31A

Description
Version:

- Axial length adjustment, adjustment travel 10 mm.
- With Balluffchip bore.

Application:

- High metal removal rate (but not for extreme heavy machining).
- For drilling, reaming, and milling.

Optional extras:

Reducer sleeves No. 302135 – 302180, coolant tube No. 309880, coolant tube socket wrench No. 309890, parallel wipers No. 343720.

Note:

A-dimension = 200 mm available on request!

Overhang dimension A: 125 mm

\varnothing D₂: 63 mm

External \varnothing D: 59 mm

L₃: 61 mm

Adjustment travel V: 10 mm

Thread M: M16×1

Technical description

L ₃	61 mm
suitable reducing adapter	302175; 302180

Overhang dimension A	125 mm
Thread M	M16×1
Adjustment travel V	10 mm
External Ø D	59 mm
Ø D ₂	63 mm
Clamping Ø D ₁	32 mm
Adapter	HSK-A 63
Arbor standard	DIN 69893
Arbor standard	DIN 69882-6
Arbor standard	DIN 69882-7
Shape	A
Through-coolant	yes, with max. 80 bar
Balance quality G at rotational speed	G 2.5 at 25,000 rpm
Concentricity	≤ 3 µm
Machining strategy	HSC
Type of product	Hydraulic clamping chuck