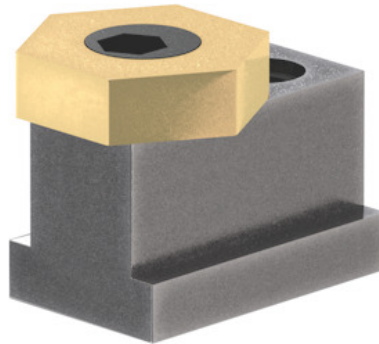


**Eccentric clamp, T-slot nominal size: 10 mm****Order data**

|              |               |
|--------------|---------------|
| Order number | 370009 10     |
| GTIN         | 4046368504244 |
| Item class   | 37M           |

**Description****Version:**

- **Small footprint, so few interference contours.**
- **For clamping workpieces of any shape.**
- **Hexagon brass washer with eccentric steel screw.**
- **Attachment in the T-slot using a locking clamping screw.**

**Application:**

Particularly suitable for clamping flat components.

**Supplied with:**

1 pc. steel screw, 1 pc. clamping washer.

Thread M: M6

Hexagon washer AF: 16 mm

Internal hexagon AF<sub>1</sub>: 4 mm

AF<sub>2</sub>: 3 mm

Eccentric travel S<sub>1</sub>: 1 mm

Washer height H: 4.8 mm

**Technical description**

|                                 |        |
|---------------------------------|--------|
| Eccentric travel S <sub>1</sub> | 1 mm   |
| Clamping force                  | 3.4 kN |

|                                          |         |
|------------------------------------------|---------|
| Internal hexagon AF <sub>1</sub>         | 4 mm    |
| maximum tightening torque                | 8.5 Nm  |
| Hexagon washer AF                        | 16 mm   |
| Washer height H                          | 4.8 mm  |
| Thread M                                 | M6      |
| AF <sub>2</sub>                          | 3 mm    |
| Length L                                 | 23.2 mm |
| maximum tightening torque, locking screw | 7.7 Nm  |