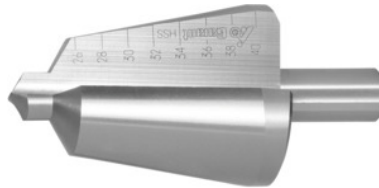


Garant
Precision taper sheet and tube drill HSS, Cutter Ø DC: 26-40 mm

Order data

Order number	118020 26-40
GTIN	4045197036469
Item class	11C

Description
Version:

With sharp drill point, pre-drilling not necessary. Conically increasing cutting edges and radially relief ground circumference for a paring cut. With scale in the flutes. Three drive flats on the shank.

Application:

Leaves no burr or chatter marks.

Sheet metal 0.1 – 2 mm, stainless steel 0.1 – 1 mm, non-ferrous metals: 0.1 – 5 mm, plastics up to 10 mm.

Shank: Three drive flats shank

Overall length: 83 mm

Shank Ø: 12 mm

Technical description

Overall length	83 mm
Cutting edge Ø D _c	26 - 40 mm
Shank Ø	12 mm
Colour ring	without
Tool material	HSS
Type of product	Stepped drill
Standard	Manufacturer's standard

Shank

Three drive flats shank