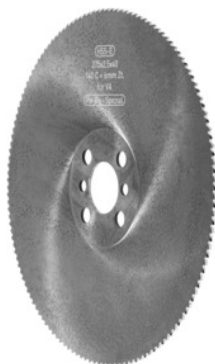


Re-Bo
Stainless steel circular saw blade coarse, Ø×thickness: 275X2,5 mm


Order data

Order number	177540 275X2,5
GTIN	4045197245427
Item class	17B

Description

Version:

Precision toothing and very fine ground side faces. **Rake angle especially for stainless steels.**

Nitrided surface: hard, durable protection against edge build-up.

Application:

Pitch t: (tooth form)

- **3 mm (BW)** – For thin pipes, profiles, sheet metal with 1 – 2 mm wall thickness.
- **4 mm (BW)** – For pipes, profiles, sheet metal with 1.5 – 4 mm wall thickness.
- **6 mm (HZ)** – For pipes, profiles and solid material above 4 mm wall thickness or cross-section up to a maximum of. 50 mm.
- **8 mm (HZ)** – For solid material above 50 mm.

Suitable for :

EISELE and **TRENNJAEGER** cold circular saws.

Note:

- **For optimum performance and service life: Use cooling lubricant concentrate No. 084260.**
- **The concentricity and axial run-out values are considerably better than the figures according to DIN 1840, in some cases by up to 50 %.**

Tool material: HSS E

Thickness: 2.5 mm

Bore Ø: 40 mm

No. of teeth Z: 140

Pitch t: 6 mm
Number of drive holes: 2; 4
Drive hole \varnothing : 9; 12 mm

Technical description

Bore \varnothing	40 mm
Pitch t	6 mm
Thickness	2.5 mm
\varnothing	275 mm
No. of teeth Z	140
Drive hole \varnothing	9; 12 mm
Drive hole pitch circle	55; 64 mm
Number of drive holes	2; 4
Tool material	HSS E
Type of product	Circular saw blade