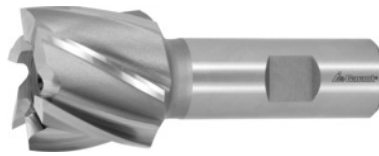


Garant
End mill, uncoated, Ø k10 DC: 35 mm

Order data

Order number	191630 35
GTIN	4045197104083
Item class	11W

Description
Version:

Multi-flute end mill. End face recessed.

Advantage:

For milling at low cutting depths (predominantly face milling).

Very reliable cutter, due to low load on the machine spindle.

Through-coolant: no

Tolerance nominal Ø: k10

No. of teeth Z: 6

Helix angle: 30 degrees

Direction of infeed: horizontal and oblique

Shank: DIN 1835 B to h6

No. of teeth Z: 6

Flute length L_c : 30 mm

Overall length L: 90 mm

Shank Ø D_s : 20 mm

Feed f_z for slot milling in steel < 750 N/mm²: 0.08 mm

Technical description

Feed f_z for slot milling in steel < 750 N/mm ²	0.08 mm
Cutting edge Ø D_c	35 mm
No. of teeth Z	6
Shank Ø D_s	20 mm

Overall length L	90 mm
Flute length L _c	30 mm
Direction of infeed	horizontal and oblique
Shank	DIN 1835 B to h6
Tolerance nominal Ø	k10
Helix angle	30 degrees
Corner chamfer angle	90 degrees
Coating	uncoated
Tool material	HSS Co 5
Type	N
Through-coolant	no
Colour ring	without
Type of product	End mill