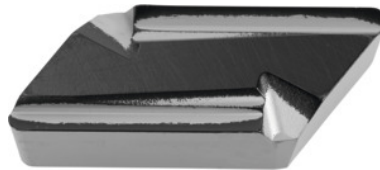


Garant
KNUX 160405R, Grade: HB7120-1

Order data

| | |
|--------------|-----------------|
| Order number | 251030 HB7120-1 |
| GTIN | 4045197819840 |
| Item class | 21G |

Description

KNUX 160405R HB7120-1 Grade: HB7120-1
 Chip breaker: VM
 Chip diverter: 2.2 mm
 Cutting depth a_p : 0.5 - 5 mm
 Feed f : 0.2 - 0.5 mm/rev.
 Cutting speed v_c main application: 80 - 260 m/min

Technical description

| | |
|--------------------------------------|-------------------|
| Cutting speed v_c main application | 80 - 260 m/min |
| Feed f | 0.2 - 0.5 mm/rev. |
| Main application | M |
| Cutting depth a_p | 0.5 - 5 mm |
| Chip diverter | 2.2 mm |
| Chip breaker | VM |
| Grade | HB7120-1 |
| Corner radius | 0.5 mm |
| Cutting conditions | continuous |
| Finishing/roughing assignment | Semi-roughing |

| | |
|---------------------------|------------------------------|
| Tool material | Carbide |
| Number of changes/inserts | 2 |
| ISO code indexable insert | KNUX 160405R |
| Type of product | Indexable insert for turning |