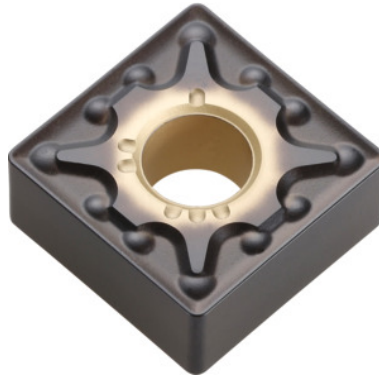


Garant
SNMG 120408, Grade: HB7010-1


Order data

Order number	251224 HB7010-1
GTIN	4045197780041
Item class	21G

Description

SNMG 120408 HB7010-1 Corner radius: 0.8 mm
 Grade: HB7010-1
 Chip breaker: SM
 Cutting depth a_p : 0.5 - 6 mm
 Feed f : 0.15 - 0.5 mm/rev.
 Cutting speed v_c main application: 120 - 440 m/min

Technical description

Cutting conditions	continuous
Feed f	0.15 - 0.5 mm/rev.
Grade	HB7010-1
Main application	P
Cutting speed v_c main application	120 - 440 m/min
Chip breaker	SM
Corner radius	0.8 mm

Cutting depth a_p	0.5 - 6 mm
Finishing/roughing assignment	Semi-roughing
Tool material	Carbide
ISO code indexable insert	SNMG 120408
Number of changes/inserts	8
Type of product	Indexable insert for turning