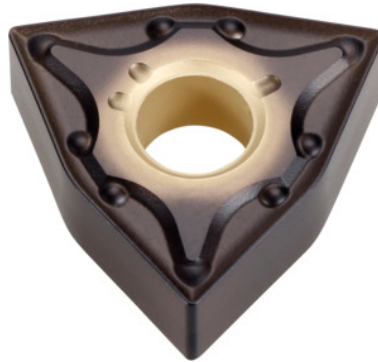


**Garant**
**WN.G 060404, Grade: HB7035-1**


## Order data

Order number	252062 HB7035-1
GTIN	4045197874986
Item class	21G

## Description

WN.G 060404 HB7035-1 Grade: HB7035-1

Chip breaker: SM

Tolerance: M

Cutting depth  $a_p$ : 0.5 - 4 mm

Feed  $f$ : 0.2 - 0.5 mm/rev.

Cutting speed  $v_c$  main application: 100 - 320 m/min

## Technical description

Corner radius	0.4 mm
Main application	P
Grade	HB7035-1
Cutting speed $v_c$ main application	100 - 320 m/min
Cutting conditions	heavily interrupted
Chip breaker	SM
Cutting depth $a_p$	0.5 - 4 mm

Feed f	0.2 - 0.5 mm/rev.
Finishing/roughing assignment	Semi-roughing
Tool material	Carbide
ISO code indexable insert	WNMG 060404
Number of changes/inserts	6
Tolerance	M
Type of product	Indexable insert for turning