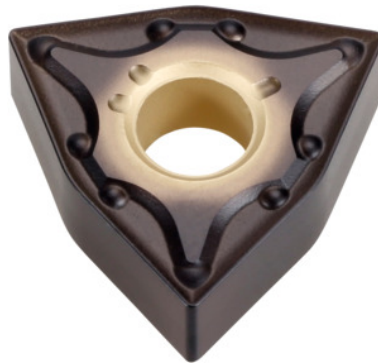


Garant
WN.G 080404, Grade: HB7035-1


Order data

Order number	252068 HB7035-1
GTIN	4045197875020
Item class	21G

Description

WN.G 080404 HB7035-1 Grade: HB7035-1

Chip breaker: SM

Tolerance: M

Cutting depth a_p : 0.5 - 4 mm

Feed f : 0.2 - 0.5 mm/rev.

Cutting speed v_c main application: 100 - 320 m/min

Technical description

Cutting depth a_p	0.5 - 4 mm
Corner radius	0.4 mm
Cutting speed v_c main application	100 - 320 m/min
Chip breaker	SM
Cutting conditions	heavily interrupted
Feed f	0.2 - 0.5 mm/rev.
Grade	HB7035-1

Main application	P
Finishing/roughing assignment	Skrubbearbejdning-sletbearbejdning
Tool material	Carbide
ISO code indexable insert	WNMG 080404
Number of changes/inserts	6
Tolerance	M
Type of product	Indexable insert for turning