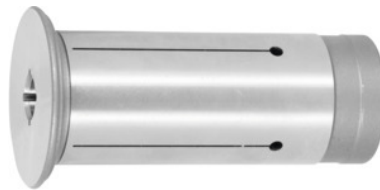


Garant
Slotted reducing adapter, Ø 20 mm, Clamping range Ø D1: 10 mm

Order data

| | |
|--------------|---------------|
| Order number | 302155 10 |
| GTIN | 4045197732682 |
| Item class | 31G |

Description
Version:
With cooling channel slots.
Application:

- **For drilling, reaming, milling, and tool sharpening.**
- **Very high flexibility due to reduction in clamping diameter.**
- **Very high torque guarantees a higher volume of metal removal compared to direct clamping.**
- **Concentricity $\pm 5 \mu\text{m}$ (system accuracy at $3 \times D$).**
- **Concentricity $\pm 2 \mu\text{m}$ (for reducing adapter).**
- **Can be used in all commercially available hydraulic clamping chucks.**

Suitable for :

 Hydraulic clamping chuck **with clamping Ø 20 mm.**

Ø D: 20 mm

Technical description

| | |
|---------------------------|-----------------|
| Clamping Ø D ₁ | 10 mm |
| Ø D | 20 mm |
| External Ø | 20 mm |
| Product name attribute | Ø 20 mm |
| Concentricity system | 5 μm |

Type of product

Hydraulic clamping chuck accessories