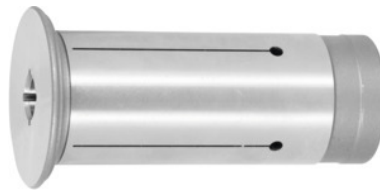


Garant
Slotted reducing adapter, Ø 32 mm, Clamping range Ø D1: 14 mm

Order data

Order number	302175 14
GTIN	4045197763280
Item class	31G

Description
Version:
With cooling channel slots.
Application:

- **For drilling, reaming, milling, and tool sharpening.**
- **Very high flexibility due to reduction in clamping diameter.**
- **Very high torque guarantees a higher volume of metal removal compared to direct clamping.**
- **Concentricity $\pm 5 \mu\text{m}$ (system accuracy at $3 \times D$).**
- **Concentricity $\pm 2 \mu\text{m}$ (for reducing adapter).**
- **Can be used in all commercially available hydraulic clamping chucks.**

Suitable for :

 Hydraulic clamping chuck **with clamping Ø 32 mm.**

Ø D: 32 mm

Technical description

Ø D	32 mm
Clamping Ø D ₁	14 mm
External Ø	32 mm
Product name attribute	Ø 32 mm
Concentricity system	5 μm

Type of product

Hydraulic clamping chuck accessories