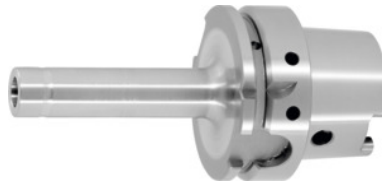


Garant
**Arbor for screw-in milling cutters with thread cylindrical form, HSK-A 63,
Thread M × Length L1: M12X125**

Order data

Order number	307042 M12X125
GTIN	4045197943965
Item class	31A

Description
Version:

Plain design.
With Balluffchip bore.

Application:

To take screw-in milling cutters with thread.

Optional extras:

Extensions No. 301358, reducers No. 301359, coolant pipe No. 309880, socket for coolant pipe No. 309890.

Note:

Densimet arbors and solid carbide extensions for screw-in milling cutters No. 301373 – 301379 and No. 301362 – 301368.

Machining strategy: HSC

Overhang dimension A: 151 mm

Bore $\varnothing D_1$: 12.5 mm

$\varnothing D_2$: 21 mm

Reach L_1 : 125 mm

L_2 : 5 mm

Technical description

Overhang dimension A	151 mm
$\varnothing D_2$	21 mm

L ₂	5 mm
Reach L ₁	125 mm
Thread M	M12×125
Bore Ø D ₁	12.5 mm
Adapter	HSK-A 63
Arbor standard	DIN 69893
Arbor standard	ISO 12164-1
Shape	A
Balance quality G at rotational speed	G 2.5 at 25,000 rpm
Concentricity	≤ 3 µm
Machining strategy	HSC
Type of product	Threaded copy mill arbor