


Garant

Arbor for screw-in milling cutters with thread cylindrical form, HSK-A 63, Thread M × Length L1: M16X25

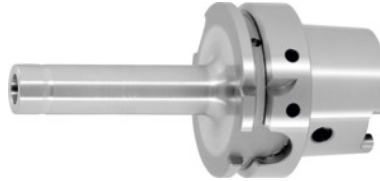

Order data

| | |
|--------------|---------------|
| Order number | 307042 M16X25 |
| GTIN | 4045197707000 |
| Item class | 31A |

Description

Version:

Plain design.

With Balluffchip bore.

Application:

To take screw-in milling cutters with thread.

Optional extras:

Extensions No. 301358, reducers No. 301359, coolant pipe No. 309880, socket for coolant pipe No. 309890.

Note:

Densimet arbors and solid carbide extensions for screw-in milling cutters No. 301373 – 301379 and No. 301362 – 301368.

Machining strategy: HSC

Overhang dimension A: 51 mm

Bore $\varnothing D_1$: 17 mm

$\varnothing D_2$: 29 mm

Reach L_1 : 25 mm

L_2 : 5 mm

Technical description

| | |
|-------------|-------|
| L_2 | 5 mm |
| Reach L_1 | 25 mm |

| | |
|---------------------------------------|--------------------------|
| Ø D ₂ | 29 mm |
| Overhang dimension A | 51 mm |
| Thread M | M16×25 |
| Bore Ø D ₁ | 17 mm |
| Adapter | HSK-A 63 |
| Arbor standard | DIN 69893 |
| Arbor standard | ISO 12164-1 |
| Shape | A |
| Balance quality G at rotational speed | G 2.5 at 25,000 rpm |
| Concentricity | ≤ 3 µm |
| Machining strategy | HSC |
| Type of product | Threaded copy mill arbor |