


## Garant

### Arbor for screw-in milling cutters with thread cylindrical form, HSK-A 63, Thread M × Length L1: M5X25

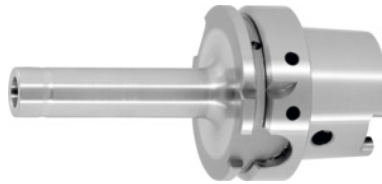

#### Order data

Order number	307042 M5X25
GTIN	4045197706867
Item class	31A

#### Description

##### Version:

Plain design.  
With Balluffchip bore.

##### Application:

To take screw-in milling cutters with thread.

##### Optional extras:

Extensions No. 301358, reducers No. 301359, coolant pipe No. 309880, socket for coolant pipe No. 309890.

##### Note:

Densimet arbors and solid carbide extensions for screw-in milling cutters No. 301373 – 301379 and No. 301362 – 301368.

Machining strategy: HSC

Overhang dimension A: 51 mm

Bore  $\varnothing D_1$ : 5.5 mm

$\varnothing D_2$ : 10 mm

Reach  $L_1$ : 25 mm

$L_2$ : 5 mm

#### Technical description

$\varnothing D_2$	10 mm
Overhang dimension A	51 mm

Reach L <sub>1</sub>	25 mm
L <sub>2</sub>	5 mm
Thread M	M5×25
Bore Ø D <sub>1</sub>	5.5 mm
Adapter	HSK-A 63
Arbor standard	DIN 69893
Arbor standard	ISO 12164-1
Shape	A
Balance quality G at rotational speed	G 2.5 at 25,000 rpm
Concentricity	≤ 3 µm
Machining strategy	HSC
Type of product	Threaded copy mill arbor