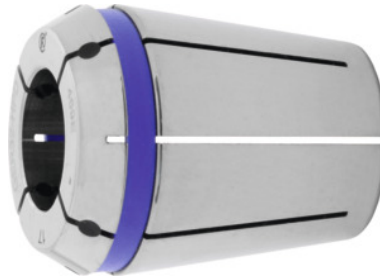


FAHRION®
PRAZISION
ER collet HP with seal, ER 32, Nominal clamping Ø d: 12 mm

Order data

| | |
|--------------|---------------|
| Order number | 309377 12 |
| GTIN | 2050001765031 |
| Item class | 33F |

Description
Version:

System concentricity and repetition accuracy **3 µm** (3×D, maximum = 50 mm), in conjunction with FAHRION CENTRO P chucks.

Corrosion protection: Collets fully coated with FAHRION Protect, including the functional faces.

Advantage:

The coating increases the service life of the collet and ensures full functionality and precision.

Suitable for :

Precision ER collet chuck CENTRO P.

Note:

- **Optimum concentricity only when used in CENTRO P chucks.**
- **Clamping range h10 (nominal size only).**

With **seal** for through-coolant feed (for use up to 100 bar). **Similar to** ISO 15488-A.

Concentricity: ≤ 2 µm

Overall length L: 40 mm

Technical description

| | |
|----------------------|-------------|
| Nominal clamping Ø d | 12 mm |
| Adapter | ER 32 |
| Standard | ISO 15488-A |

| | |
|------------------|---------------|
| Concentricity | ≤ 2 μm |
| Type | 469 E |
| External Ø D | 32.7 mm |
| Overall length L | 40 mm |
| Type of product | Clamping head |