




Grinding and inspection vice without spindle, Jaw width A: 100 mm

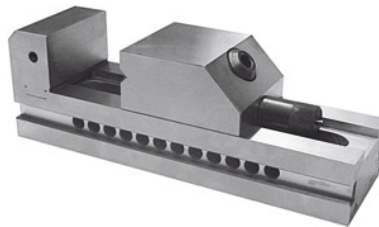

Order data

Order number	363650 100
GTIN	4045197313621
Item class	38F

Description

Version:

- **Hardened steel; precision ground all round.**

Working on 4 different faces (front, rear, and side faces).

Movable jaw can be slid to the component by hand and clamped. **On release, the movable jaw automatically backs away from the component.**

Function:

Pull-down system – The movable jaw is pulled down by the resulting clamping force; no lifting of the component or vibration during machining.

Application:

For **machining and inspection true to gauge.**

Accuracy:

Within **0.003 mm** / 100 mm (system accuracy).

maximum clamping range b: 160 mm

Jaw height C: 40 mm

Overall length a: 270 mm

Overall width B: 100 mm

Weight: 9.5 kg

Technical description

maximum clamping range b	160 mm
Overall length a	270 mm

Weight	9.5 kg
Jaw width A	100 mm
Jaw height C	40 mm
Overall width B	100 mm
Type of product	Checking vice