




Permanent magnetic clamping plate, fine pole distribution, Pole area length: 300 mm

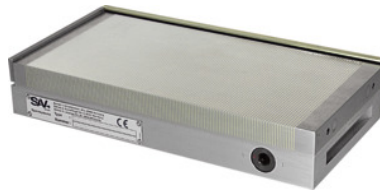

Order data

Order number	380500 300
GTIN	4045197310699
Item class	33S

Description

Version:

- Neodymium magnet system for strong clamping force.
- Through transverse pole distribution.
- Uniform clamping force over entire width and side faces of the pole area.
- Lamellae made of 0.5 mm brass / 1.4 mm steel.

Application:

- For grinding and spark erosion machines.
- Universal clamping of small and medium-sized components of any thickness. (Particularly suitable for thin components).
- Consistent clamping force over entire width and side faces guaranteed.

Width: 150 mm

Height: 51 mm

Height tolerance: +0,5 / -2 mm

Magnetic field height: 6 mm

Grinding allowance in pole area: 8 mm

Weight: 19.7 kg

Technical description

Nominal clamping force	80 N/cm ²
Height	51 mm

Width	150 mm
Height tolerance	+0,5 / -2 mm
Grinding allowance in pole area	8 mm
Pole area length	300 mm
Weight	19.7 kg
Magnetic field height	6 mm
Type of product	Magnetic clamping plate