




Neodymium magnetic clamping block, Length: 200 mm

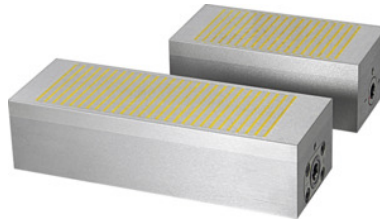

Order data

Order number	380870 200
GTIN	4045197311320
Item class	33S

Description

Version:

- **Extremely high clamping force due to specially developed process.**
- **Sturdy all-steel body with an ON-OFF switch on the end face.**
- **Lamellae made of 2 mm brass / 4 mm steel.**
- **Neodymium magnetic system.**

Application:

- **For components which are difficult to clamp, such as Ferrotic, carbide with cobalt.**
- **For spark erosion and grinding.**

Note:

Adaptors optionally available for all zero-point clamping systems GARANT Zeroclamp on the market (Partool, 3R, Mecatool, Erowa, etc.). **Please supply the respective data when ordering.**

Width: 70 mm

Height: 51 mm

Height tolerance: +0,5 / -2 mm

Magnetic field height: 4 mm

Weight: 4.2 kg

Nominal clamping force: 180 N/cm²

Technical description

Weight	4.2 kg
Height	51 mm

Magnetic field height	4 mm
Width	70 mm
Length	200 mm
Nominal clamping force	180 N/cm ²
Height tolerance	+0,5 / -2 mm
Type of product	Magnetic clamping plate