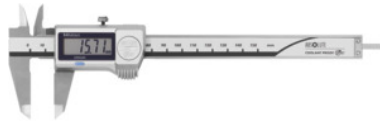


Mitutoyo
Digital caliper IP67, Measuring range: 300 mm

Order data

Order number	412623 300
GTIN	4946368727912
Item class	44A

Description
Version:

Electronic caliper with absolute electronics and large easy-to-read display. Resistant to water, oil, and dust. Low energy consumption permits 18000 h continuous use on a single battery (size 300: 5000 h). The device is turned on automatically when it is moved and switches off automatically when not used for about 20 minutes.

Function:

IP67: Protected against intermittent immersion in water and protected against penetration by dust (dust-tight), also completely protected against touching.

Supplied with:

1 battery No. 081560 size 357.

Packaging: sturdy box

Standard: Manufacturer's standard

Depth gauge: flat

IP Index of Protection: IP 67

Measured value saving: once-off setting of the zero position

Calibration: A1

Scale divisions: 0.01 mm

Error limit: 0.04 mm

Jaw length: 64 mm

Technical description

Scale divisions	0.01 mm
Article no of the battery / rechargeable battery fitted	081560 357
Depth gauge	flat

Measured value saving	once-off setting of the zero position
Measurement value and zero point preserved after reactivation from standby	yes
Depth gauge available	yes
Calibration	A1
Number of batteries contained	1
Measuring range	0 - 300 mm
Standard	Manufacturer's standard
Error limit	0.04 mm
Jaw length	64 mm
Auto switch-off	yes
IP Index of Protection	IP 67
Power supply	Battery-powered
Measurement technology	digital
Material	Stainless steel, INOX
all parts	hardened
Packaging	sturdy box
Type of product	Vernier caliper standard

Services

Calibration Calipers / depth gauges maximum measuring range 300 mm	011030 300
DAkkS calibration Calipers / depth gauges maximum measuring range 300 mm	011050 300
Labelling laser-etched Type	018940