




Precision bore gauge OSIMESS, Measuring range: 4,5-12 mm

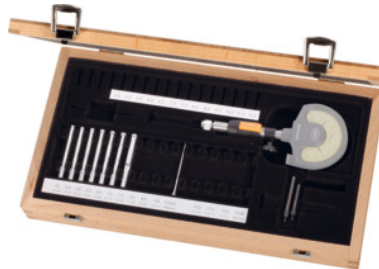

Order data

Order number	435010 4,5-12
GTIN	2050001047922
Item class	46D

Description

Version:

OSIMESS internal precision bore gauge for small bores from 1 mm. Probes hard chrome-plated (from size 4.5-7.5). The tapered form of the gauging pin, under the measuring force of the precision bore gauge, expands the slotted probe. **Repetition accuracy 1 µm.**

Application:

Determination of deviation from nominal value and shape errors such as run-out or conicity.

Supplied with:

Contact heads, carbide gauging pins, standard holder (display unit and setting rings not included).

Optional extras:

Precision dial comparator No. 434674, inductive precision dial comparator No. 434670, dial indicator with anticlockwise scale No. 434807 size 10, digital dial indicator No. 434322, comparator stand No. 435020.

Note:

Versions up to 20 mm measurement range and for blind holes available on request.

Calibration: Price on request

effective application range: 4.15 - 12.5 mm

Repetition accuracy: 1 µm

Measurement depth: 41 - 45 mm

Number of probe tips: 13

Number of carbide gauging pins: 2

Technical description

Number of carbide gauging pins	2
Number of probe tips	13
effective application range	4.15 - 12.5 mm
Repetition accuracy	1 μ m
Measuring range	4.5 - 12 mm
Measurement depth	41 - 45 mm
Packaging	sturdy box
Calibration	Price on request
Type of product	Precision bore gauge

Services

Labelling laser-etched Type	018940
M	023240 M
G	023240 G

Accessories

Dial indicator with anticlockwise scale Measuring range 10 mm	434807 10
Precision dial comparator \pm measuring range / reading 1500/50 μ m	434674 1500/50
Probe for OSIMESS internal precision bore gauges Application range 7,20-7,80 mm	435015 7,20-7,80
Clamp with return key for nominal measuring range 0,95-20,6 mm	435013 0,95-20,6
Inductive precision comparator Extramess Type 2000	434670 2000
Digital dial indicator 0.0005 mm reading Measuring range 12,5 mm	434322 12,5
Precision dial comparator \pm measuring range / reading 25/0,5 μ m	434674 25/0,5

Inductive precision comparator Extramess Type 2001	434670 2001
Clamp without return key for nominal measuring range 0,95-20,6 mm	435012 0,95-20,6
Set of steel setting rings (dimensions as for probe tips) Measuring range 4,5-12 mm	435030 4,5-12
Precision dial comparator \pm measuring range / reading 50/1 μm	434674 50/1
Angle clamp for OSIMESS for nominal measuring range 0,95-20,6 mm	435014 0,95-20,6
Comparator stand for OSIMESS Manufacturer's designation OSM6	435020 OSM6
Precision dial comparator \pm measuring range / reading 130/5 μm	434674 130/5
Inductive precision comparator Extramess Type 2100	434670 2100
Comparator stand for OSIMESS Manufacturer's designation OSM5	435020 OSM5
Precision dial comparator \pm measuring range / reading 250/10 μm	434674 250/10