


Kroepelin
Längenmesstechnik

External quick caliper with dial gauge, Measuring range: 0-50 mm

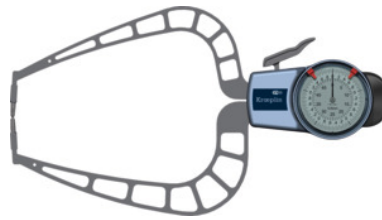

Order data

Order number	438555 0-50
GTIN	2050002043459
Item class	46Q

Description

Version:

1 fixed and 1 movable arm with carbide spherical contact points. The deflection of the moving contact point is transmitted to the dial indicator. The measured result can be read directly.

Function:

IP65: Protected against jets of water from all directions and protected against penetration by dust (dust-tight), also completely protected against touching.

Application:

For quick measuring of external grooves, wall thicknesses, plates, pipe wall thicknesses, foils etc.

Calibration: C7

IP Index of Protection: IP 65

Scale divisions: 0.05 mm

Error limit: 0.05 mm

Carbide spherical point \varnothing : 3 mm

maximum contact point length L (measurement depth): 167 mm

Dial indicator \varnothing : 66 mm

Technical description

maximum contact point length L (measurement depth)	167 mm
Measuring range	0 - 50 mm
Error limit	0.05 mm
Scale divisions	0.05 mm

Carbide spherical point \emptyset	3 mm
Dial indicator \emptyset	66 mm
IP Index of Protection	IP 65
Standard	Manufacturer's standard
Measurement technology	analogue
Calibration	C7
Type of product	External quick calipers

Services

Labelling laser-etched Type	018940
Calibration External / internal quick caliper	013850
DAkkS calibration External / internal quick caliper	011320
DAkkS calibration External / internal quick caliper Type S	023460 S
Calibration External / internal quick caliper Type S	023450 S