


**3M Roloc™**  
**Grinding disc 984F, Ø 76.2 mm, Grit: 60**

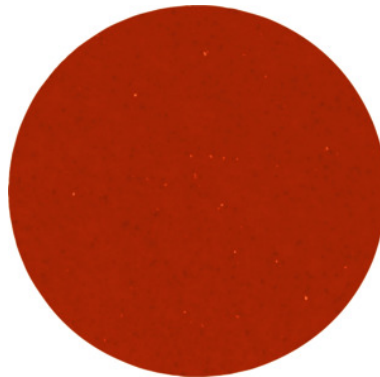

### Order data

Order number	554006 60
GTIN	2050001747952
Item class	53M

### Description

**Version:**

**Very high material removal rate and service life** due to the use of self-sharpening ceramic grit (CER).

The Roloc™, Combidisc® CDR **quick-change system** with a plastic thread permits safe abrasive tool changing "with a single twist of the wrist" in a very short time.

With precision formed **Cubitron™ II** grit.

**Application:**

For efficient abrasion of small areas, even with changing contours. Reduced tool changing times save costs on multi-stage operations.

Use in conjunction with hard support pad No. 554089.

**Note:**

**Roloc™ bristle discs** can be found from No. 573510 onwards.

Grinding medium code: Ceramic

maximum speed: 20000 rpm

### Technical description

Grit	60
Disc Ø	76.2 mm

Grinding media	Cubitron™ II
Grinding medium code	Ceramic
Grinding media backing	stable-edged underlay
Product name attribute	Ø 76.2 mm
Manufacturer's designation	984F
maximum speed	20000 rpm
Type of product	Grinding wheel

---

## Accessories

Rubber backing pad with mounting M14 hard External Ø 75 mm	554088 75
Rubber backing pad with M14 mounting hard External Ø 75 mm	554094 75
Rubber backing pad shank Ø 6 mm hard External Ø 75 mm	554089 75