


3M Roloc™
Abrasive disc 777F, 50.8 mm Ø, Grit: 60

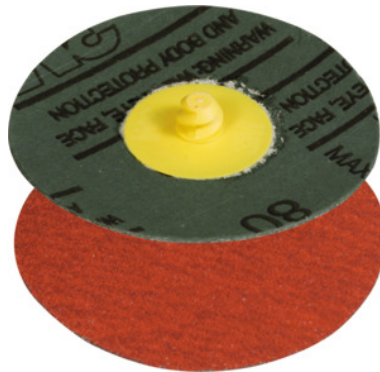

Order data

| | |
|--------------|--------------|
| Order number | 554025 60 |
| GTIN | 511447643342 |
| Item class | 53M |

Description

Version:

The Roloc™, Combidisc® CDR **quick-change system** with a plastic thread permits safe abrasive tool changing "with a single twist of the wrist" in a very short time.

Very high material removal rate and service life due to the use of self-sharpening ceramic grit (CER).

Application:

For efficient abrasion of small areas, even with changing contours. Reduced tool changing times save costs on multi-stage operations.

Note:

Roloc™ bristle discs can be found from No. 573510 onwards.

Grinding medium code: Ceramic

maximum speed: 25000 rpm

Colour code: orange

Technical description

| | |
|-------------|---------|
| Grit | 60 |
| Colour code | orange |
| Disc Ø | 50.8 mm |

| | |
|----------------------------------|--------------------|
| Grinding media | Ceramic grit (CER) |
| Grinding medium code | Ceramic |
| Product name attribute | 50.8 mm Ø |
| Manufacturer's designation | 777F |
| suitable for quick-change system | Roloc™ |
| maximum speed | 25000 rpm |
| Type of product | Grinding wheel |

Accessories

| | |
|--|-----------|
| Rubber backing pad shank Ø 6 mm hard External Ø 50 mm | 554089 50 |
| Rubber backing pad shank Ø 6 mm medium hard External Ø 50 mm | 554093 50 |
| Plastic backing pad shank Ø 6 mm External Ø 50 mm | 554090 50 |
| Rubber backing pad shank Ø 6 mm medium External Ø 50 mm | 554092 50 |
| Rubber backing pad shank Ø 6 mm soft External Ø 50 mm | 554091 50 |