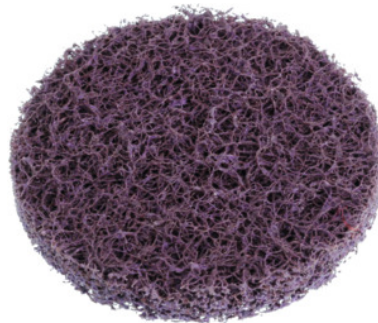


**3M Roloc™**
**Cleaning disc (A), Ø 76.2 mm, Fleece version: MED**


## Order data

Order number	554065 MED
GTIN	50048011642067
Item class	53M

## Description

### Version:

The Roloc™, Combidisc® CDR **quick-change system** with a plastic thread permits safe abrasive tool changing "with a single twist of the wrist" in a very short time.

Coarse cleaning disc with synthetic nylon fleece evenly impregnated with abrasive grit on glass fibre pad. Open structure, will not clog. Combines **cleaning** with imparting a **fine finish**.

### Application:

For efficient abrasion of small areas, even with changing contours. Reduced tool changing times save costs on multi-stage operations.

For rust removal, paint removal, dressing weld seams and removing surface dirt.

### Note:

**Roloc™ bristle discs** can be found from No. 573510 onwards.

Iron, sulphur and chlorine constituents: < 0.1 %

Grit designation: coarse

Degree of hardness: medium

3M designation: BF-DR

maximum speed: 15000 rpm

## Technical description

maximum speed	15000 rpm
---------------	-----------

Degree of hardness	medium
Grit designation	coarse
3M designation	BF-DR
Disc Ø	76.2 mm
Grinding media	Standard aluminium oxide (A)
Grinding medium code	A
Iron, sulphur and chlorine constituents	< 0.1 %
Product name attribute	Ø 76.2 mm
Type of product	Rough cleaning non-woven abrasive mesh

## Accessories

Rubber backing pad shank Ø 6 mm medium hard External Ø 75 mm	554093 75
Plastic backing pad shank Ø 6 mm External Ø 75 mm	554090 75
Rubber backing pad with mounting M14 hard External Ø 75 mm	554088 75
Rubber backing pad shank Ø 6 mm hard External Ø 75 mm	554089 75
Rubber backing pad shank Ø 6 mm medium External Ø 75 mm	554092 75
Rubber backing pad with M14 mounting hard External Ø 75 mm	554094 75
Rubber backing pad shank Ø 6 mm soft External Ø 75 mm	554091 75