




Cupped flap wheel (A), 60 grit, Head \varnothing ×head width: 60X40 mm

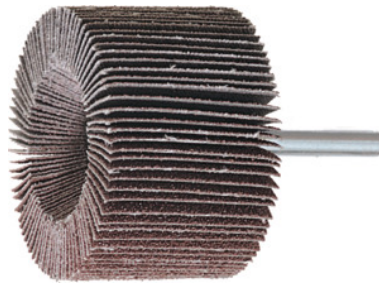

Order data

Order number	555000 60X40
GTIN	4045197241276
Item class	52E

Description

Version:

Flap strips bonded on to the shank of the tool.

Cup shaped strip arrangement around the shank of the tool, with recessed core. Shank \varnothing 6 mm.

Application:

Primarily for finish grinding and polishing tasks on larger radii in tool and mould making, for vessel and machine fabrication. The abrasive strips adapt to the contours of the component. Particularly suitable for peripheral and internal face sanding.

Grinding medium code: A

Shank \varnothing : 6 mm

recommended speed: 8000 rpm

maximum speed: 12000 rpm

Technical description

Head width	40 mm
maximum speed	12000 rpm
recommended speed	8000 rpm
Grit	60

Shank Ø	6 mm
Head Ø	60 mm
Grinding media	Aluminium Oxide grit (A)
Grinding medium code	A
Product name attribute	60 grit
Type of product	Flap wheel