




## KF 708 fibre disc fused aluminium oxide (A), Ø 115 mm, Grit: 50

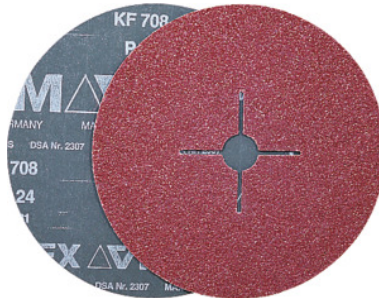

### Order data

Order number	566400 50
GTIN	4018875278178
Item class	56V

### Description

#### Version:

Tear-resistant but very flexible **vulcanised fibre**. Bore diameter 22.23 mm and crossed slots.

**VSM KF 708 high-quality universal fibre disc** for grinding metals, plastic, wood etc. Grit type:

**Fused aluminium oxide (A).**

#### Application:

Limited to maximum 80 m/s circumferential speed with backing pads No. 566650 / 566670 on angle grinders. For **grinding flat and curved surfaces** with a high degree of **flexibility**.

maximum circumferential speed: 80 m/s

Manufacturer's designation: VSM KF 708

### Technical description

Grit	50
Manufacturer's designation	VSM KF 708
Disc Ø	115 mm
Grinding media	Fused aluminium oxide (A)
Grinding medium code	A
Grinding media backing	Vulcanised fibre

Iron, sulphur and chlorine constituents	< 0.1 %
Product name attribute	Ø 115 mm
Adapter	Roloc™ quick-change system
Bore Ø	22.23 mm
suitable for quick-change system	Roloc™
optimised for material	Steel
maximum circumferential speed	80 m/s
maximum speed	13300 rpm
Type of product	Fibre disc

---

## Accessories

Backing pad hard/ribbed External Ø 115 mm	566672 115
ISO backing pad flexible/smooth External Ø 108 mm	566650 108
ISO backing pad medium hard/ripped External Ø 108 mm	566670 108