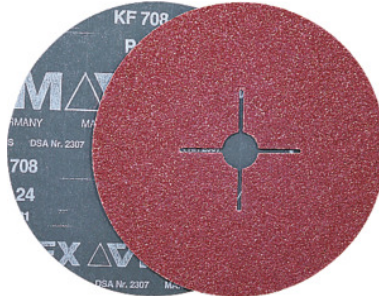



KF 708 fibre disc fused aluminium oxide (A), Ø 125 mm, Grit: 80

Order data

| | |
|--------------|---------------|
| Order number | 566500 80 |
| GTIN | 4018875881705 |
| Item class | 56V |

Description
Version:

Tear-resistant but very flexible **vulcanised fibre**. Bore diameter 22.23 mm and crossed slots.

VSM KF 708 high-quality universal fibre disc for grinding metals, plastic, wood etc. Grit type:

Fused aluminium oxide (A).

Application:

Limited to maximum 80 m/s circumferential speed with backing pads No. 566650 / 566670 on angle grinders. For **grinding flat and curved surfaces** with a high degree of **flexibility**.

maximum circumferential speed: 80 m/s

Manufacturer's designation: VSM KF 708

Technical description

| | |
|----------------------------|---------------------------|
| Manufacturer's designation | VSM KF 708 |
| Grit | 80 |
| Disc Ø | 125 mm |
| Grinding media | Fused aluminium oxide (A) |
| Grinding medium code | A |
| Grinding media backing | Vulcanised fibre |

| | |
|---|----------------------------|
| Iron, sulphur and chlorine constituents | < 0.1 % |
| Product name attribute | Ø 125 mm |
| Adapter | Roloc™ quick-change system |
| Bore Ø | 22.23 mm |
| suitable for quick-change system | Roloc™ |
| optimised for material | Steel |
| maximum circumferential speed | 80 m/s |
| maximum speed | 12200 rpm |
| Type of product | Fibre disc |

Accessories

| | |
|--|------------|
| Backing pad hard/ribbed External Ø 125 mm | 566672 125 |
| ISO backing pad medium hard/ripped External Ø 117 mm | 566670 117 |
| ISO backing pad flexible/smooth External Ø 117 mm | 566650 117 |