




Wheel brush X-LOCK, stainless steel wire 0.50 mm, Brush Ø×bore Ø / Thread: 125X-LOCK mm

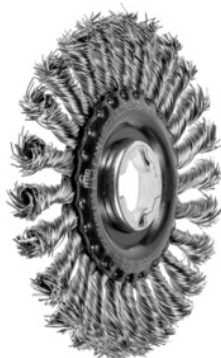

Order data

| | |
|--------------|------------------|
| Order number | 571251 125X-LOCK |
| GTIN | 4007220118771 |
| Item class | 55V |

Description

Version:

Straight round brush with smooth wire 0.50 mm, **plaited** and firmly crimped into the steel body.

Very aggressive brushing effect with high wear resistance.

Application:

Left-hand plaited, reliably avoids premature unwinding.

For heavy brush work, e.g. descaling, removing rust, removing paint, roughening, cleaning metal parts, also for cleaning formwork boards.

With **X-LOCK** quick-release clamping system for quick changing of brushes, no tools required.

Bristle width L_1 : 12 mm

Length of brush section H_1 : 28 mm

Number of twisted knots: 24

maximum speed: 12500 rpm

Technical description

| | |
|-------------------------|--------|
| Number of twisted knots | 24 |
| Brush Ø D_1 | 125 mm |

| | |
|--|----------------------|
| maximum speed | 12500 rpm |
| Bristle thickness | 0.5 mm |
| Length of brush section H ₁ | 28 mm |
| Bristle width L ₁ | 12 mm |
| Brush material | Stainless steel wire |
| Twisted knotting | left-hand plait |
| Type of product | Wheel brush |