




Precision surface grinding wheel D×T×H (mm), 300×40×127, Type: C60

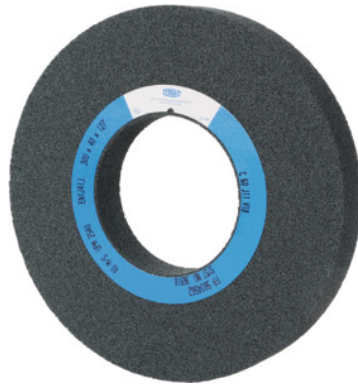

Order data

| | |
|--------------|---------------|
| Order number | 591810 C60 |
| GTIN | 9003170369183 |
| Item class | 53Y |

Description

Version:

High performance surface grinding wheels with high-porosity bonding system for reduced thermal loading and minimal dressing diamond wear.

- **Universally applicable for reciprocating grinding processes, which significantly reduces the frequency of wheel changes in daily operation.**
- **For use on all commercially available grinding machines for tool and die making and machine tool building, e.g. Jung, ABA, Blohm, Elb, Mägerle, Ziersch & Baltrusch, Geibel & Hotz, Jones & Shipman.**
- **Cooling with emulsion is necessary, ensure good lubrication, especially on long-chipping materials.**

Open-pored **silicon carbide** grinding wheel with **low tendency to clog**. Suitable for grinding aluminium, NF metals, titanium, carbide and cast iron.

Application:

- **Universally applicable for reciprocating grinding processes, which significantly reduces the frequency of wheel changes in daily operation.**
- **Can be used on all commercially available grinding machines for tool and die making and machine tool building e.g. Jung, ABA, Blohm, Elb, Mägerle, Ziersch&Baltrusch, Geibel&Hotz, Jones&Shipman.**
- **Cooling with emulsion is necessary, ensure good lubrication, especially on long-chipping materials.**

**Specification:
C60J11V18.****Note:**

Profile surface grinding wheels available on request.

Shape: 1

Shape: 1

Technical description

| | |
|------------------------|---------------------|
| Grinding process | Surface grinding |
| Grinding media | Silicon carbide |
| Grinding medium code | SiC |
| Specification | C60J11V18 |
| Shape | 1 |
| Disc Ø D | 300 mm |
| Disc thickness T | 40 mm |
| Product name attribute | 300×40×127 |
| Bore Ø H | 127 mm |
| Type of product | Flat grinding wheel |