




## Torque screwdriver fully insulated, Type: 5

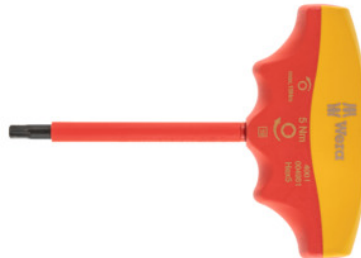

### Order data

Order number	659953 5
GTIN	4013288206114
Item class	63F

### Description

#### Version:

Ergonomically shaped multi-component cross-head handle for optimum force transfer. Every screwdriver is preset to the **correct torque for each size of screw**. Drive size and torque are stamped on to the handle. When the set torque is reached the screwdriver triggers, with clearly audible and perceptible signals. It is **not possible to tighten the screw any further**. The release torque is higher than the tightening torque (overload protection).

Handle and blade **fully insulated up to 1000 V** to **DIN EN 60900 / VDE 0682-201**.

#### Suitable for :

Hexagon socket head screws.

Direction of tightening: Right-hand tightening

Torque measuring accuracy:  $\pm 10\%$

Torque measuring accuracy:  $\pm 10\%$

Overall length L: 141 mm

Blade length: 93 mm

set torque: 5 Nm

set torque: 500 cNm

### Technical description

Adjustable trigger value	non-adjustable
Overall length L	141 mm

Series	400 i VDE
Data can be recorded	no
Torque measuring accuracy	±10 %
Setting the trigger value	forudindstillet
Feedback	triggering
Direction of tightening	Right-hand tightening
set torque	500 cNm
Measurement technology	mechanical
Trigger principle	mechanical slip clutch
set torque	5 Nm
Measurement process	Torque
Connection format	exchangeable blade
Release signalling	haptisk
Blade length	93 mm
Reversible reading	Nm
maximum torque	5 cNm
Drive profile	Hexagon screwdriver
Torque fixed setting	yes
Type of product	Torque screwdriver