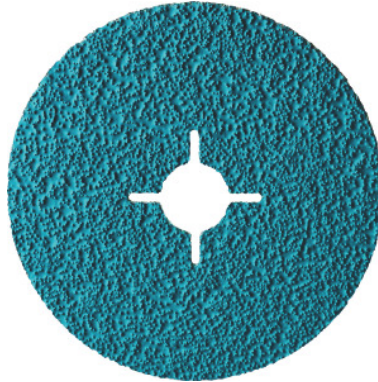



**Fibre disc Actirox AF 890 (CER), Ø 180 mm, Grit: 36**

**Order data**

Order number	566444 36
GTIN	4018875091593
Item class	56V

**Description**
**Version:**

Tear-resistant but very flexible **vulcanised fibre**. Bore diameter 22.23 mm and crossed slots. Top type VSM Actrirox AF 890 fibre discs **with very high and aggressive grinding performance**. Cool grinding and outstanding tool life.

Grit type: **100% geometrically shaped VSM ceramic grit** with abrasive coating (TOP SIZE).

**Application:**

Limited to maximum 80 m/s circumferential speed with backing pads No. 566650 / 6670 on angle grinders. For **grinding flat and curved surfaces** with a high degree of **flexibility**. maximum circumferential speed: 80 m/s

**Technical description**

Disc Ø	180 mm
Grit	36
Grinding media	Ceramic ZA Oxide mixed grit with cooling, active coating (TOP SIZE)
Grinding medium code	Stainless steel

Grinding media backing	Vulcanised fibre
Iron, sulphur and chlorine constituents	< 0.1 %
Product name attribute	Ø 180 mm
Bore Ø	22.23 mm
optimised for material	Steel
optimised for material	Aluminium
maximum circumferential speed	80 m/s
Type of product	Fibre disc