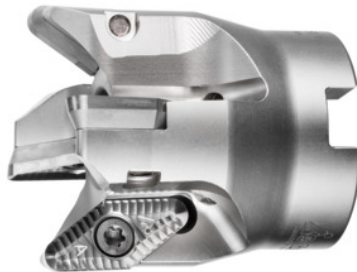


Garant
Plunge milling cutter 93°, with bore, Ø D / number of teeth Z: 50/4 mm

Order data

Order number	211807 50/4
GTIN	4045197715043
Item class	210

Description
Version:

Greater tool stiffness by elimination of twist between indexable insert and insert seat.

Application:

To prevent chips jamming, especially when milling deep pockets.

Note:

Use GARANT torque screwdriver TQ No. **211750 size 5.7** with bit No. **674252 size 20IP**.

Tool exchange: PowerCard

Ø D₃: 44 mm

Overall length L_{tot}: 55 mm

Mounting bore Ø: 22 mm

Circular interpolation milling Ø D_{min}: 94 mm

Circular interpolation milling Ø D_{max}: 98 mm

Circular interpolation milling a_p: 10 mm

Technical description

Cutting edge Ø D _c	50 mm
Pack of insert screws	219800 (20IP; 5.7 Nm)
Overall length L _{tot}	55 mm
suitable indexable insert	VCG. 2205

Mounting bore \varnothing	22 mm
Number of cutting edges Z	4
Circular interpolation milling $\varnothing D_{\max}$	98 mm
Ramping angle α_{\max}	10.5 degrees
Circular interpolation milling a_p	10 mm
Circular interpolation milling $\varnothing D_{\min}$	94 mm
Ramping length L for α_{\max}	37.78 mm
Shank type	with bore
Setting angle κ	93 degrees
Milling application	Circular milling
Milling application	Ramping
Through-coolant	yes
Machining strategy	MTC
Tool exchange	PowerCard
Type of product	Indexable insert cutter

Accessories

PrecisionBit for Torx Plus®, shank E 6.3 Torx Plus® profile 10IP	674252 10IP
Set of insert screws 10 pieces	219800
Torque screwdriver, fixed setting set torque 5,7 Nm	211750 5,7