




## Shell end mill 90° MECH11, with bore, Ø D/Zeff: 50/6 mm

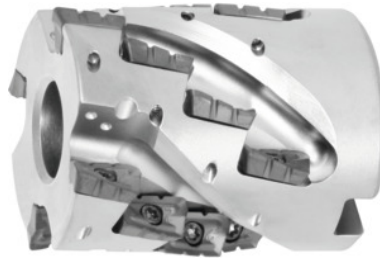

### Order data

Order number	227455 50/6
GTIN	4960664526406
Item class	250

### Description

#### Version:

Notched indexable inserts reduce the cutting forces and vibration. Comparatively larger cutting widths  $a_e$  can be achieved with the same cutting depth  $a_p$ . High productivity even on machines with low spindle power.

Through-coolant: no

ISO code indexable insert: BDMT 11T308

Number of effective inserts  $Z_{\text{eff}}$ : 6

Number of indexable inserts: 30

maximum cutting depth  $a_{p\text{max}}$ : 46 mm

Overall length  $L_{\text{tot}}$ : 63 mm

Mounting bore Ø: 22 mm

### Technical description

Mounting bore Ø	22 mm
Cutting edge Ø $D_c$	50 mm
Overall length $L_{\text{tot}}$	63 mm
suitable indexable insert	BDMT 11T308
Insert screw	229708 (T8; 1.2 Nm)
ISO code indexable insert	BDMT 11T308

Number of effective inserts $Z_{\text{eff}}$	6
maximum cutting depth $a_{p \text{ max}}$	46 mm
Number of indexable inserts	30
Shank type	with bore
Setting angle $\kappa$	90 degrees
Milling application	End milling
Through-coolant	no

---

## Accessories

Clamping screw	229708
----------------	--------