




Modular vice long, Jaw width A: 125 mm

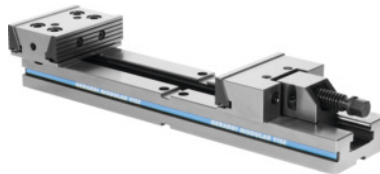

Order data

Order number	362105 125
GTIN	2050001774262
Item class	35G

Description

Version:

- **Simple mechanical actuation (up to 3.5 t).**
- **Easy adjustment of jaw opening.**
- **Machine vice with pull-down jaws.**
- **Case-hardened HRC 60.**
- **Parallelism 0.02 mm.**

Supplied with:

Supplied with pull-down jaws, 1 workpiece backstop, 2 T-nuts No. 362160 size 16/16, 1 clamping wrench, 1 cross-bar wrench.

Note:

See No. 362160 for other T-nuts.

Weight: 18.3 kg

Overall length L: 520 mm

Clamping range b: 320 mm

Base body height G: 40 mm

Jaw height C: 40 mm

Longitudinal tenon slot l: 16 mm

Technical description

Clamping range b	320 mm
Base body height G	40 mm
Jaw height C	40 mm

Colour code for suitable accessories	Gerardi 125
Transverse tenon slot n	16 mm
Longitudinal tenon slot l	16 mm
Jaw width A	125 mm
Overall length L	520 mm
Weight	18.3 kg
maximum clamping force at 60 Nm	25 kN
Series	Gerardi 125
Type of product	Machine vice

Accessories

Pair of T-nuts T-slot dimension B / keyway 18/16 mm	362160 18/16
Longitudinally serrated front jaw (piece) for jaw width 125 mm	362146 125
Pair of clamps for jaw width 125 mm	362120 125
Pair of T-nuts T-slot dimension B / keyway 12/16 mm	362160 12/16
Smooth front jaw, hard (piece) for jaw width 125 mm	362147 125
Pair of T-nuts T-slot dimension B / keyway 16/16 mm	362160 16/16
Pair of T-nuts T-slot dimension B / keyway 14/16 mm	362160 14/16
Centre jaw (piece) for jaw width 125 mm	362142 125
Modular element fixed (piece) for jaw width 125 mm	362150 125
Square top jaw (piece) for jaw width 125 mm	362130 125
Modular element movable (piece) for jaw width 125 mm	362145 125
Angled top jaw (piece) for jaw width 125 mm	362140 125
Complete clamping element (piece) for jaw width 125 mm	362144 125
Prismatic top jaw (piece) for jaw width 125 mm	362135 125
Smooth front jaw, soft (piece) for jaw width 125 mm	362148 125
Prismatic jaw (piece) for jaw width 125 mm	362125 125

Pair of T-nuts T-slot dimension B / keyway 20/16 mm	362160 20/16
Movable jaw (piece) for jaw width 125 mm	362143 125