




## Grinding and inspection vice without spindle, Jaw width A: 65 mm

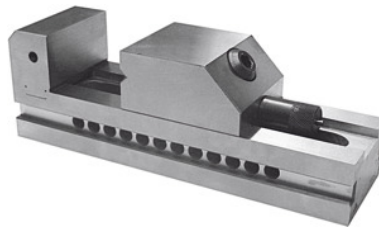

### Order data

Order number	363650 65
GTIN	4045197313614
Item class	38F

### Description

#### Version:

- **Hardened steel; precision ground all round.**

**Working on 4 different faces** (front, rear, and side faces).

Movable jaw can be slid to the component by hand and clamped. **On release, the movable jaw automatically backs away from the component.**

#### Function:

**Pull-down system** – The movable jaw is pulled down by the resulting clamping force; no lifting of the component or vibration during machining.

#### Application:

For **machining and inspection true to gauge.**

#### Accuracy:

Within **0.003 mm** / 100 mm (system accuracy).

maximum clamping range b: 130 mm

Jaw height C: 37 mm

Overall length a: 230 mm

Overall width B: 65 mm

Weight: 4.3 kg

### Technical description

Overall length a	230 mm
Weight	4.3 kg

maximum clamping range b	130 mm
Jaw width A	65 mm
Jaw height C	37 mm
Overall width B	65 mm
Type of product	Checking vice