




Bench centre RGP, for workpiece Ø: 1-25 mm

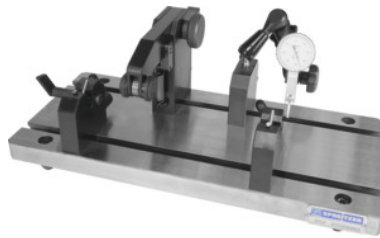

Order data

Order number	443210 1-25
GTIN	2050001698803
Item class	46L

Description

Version:

Hardened and ground base plate with 2 clamping slots. Stepless movement of the Vee blocks (with carbide coating), the scrolling device, and the jointed stand. Universal stop, which is ground flat and can be mounted perpendicularly in relation to the Vee blocks. The **Vee angle of 108°** allows even polygonal parts to be inspected. Pivoting jointed stand for dial indicator or lever indicator.

Application:

Inspection of axial and radial run-out of rotation parts.

Supplied with:

Base plate with 2 Vee blocks and a stop, scrolling device, and jointed stand (without dial indicator)

Optional extras:

Jointed stand with T-nut No. 443295. Scrolling and Vee blocks No. 443050 – 443160 with Tee-nut width 10 h6. Height-adjustable Vee blocks on request.

T-slot width H7: 10 mm

Footprint length: 350 mm

Baseplate width: 160 mm

Weight: 12 kg

Technical description

Footprint length	350 mm
for workpiece Ø	1 - 25 mm

Weight	12 kg
Baseplate width	160 mm
T-slot width H7	10 mm
Type of product	Vee block radial and axial run-out tester

Accessories

Pair of bench inspection rollers for tip height 50/75 mm	443160 50/75
Pair of bench inspection rollers height adjustable for maximum workpiece Ø 32 mm	443050 32
Jointed stand with T-nut Throat 200 mm	443295 200
Jointed stand with T-nut Throat 130 mm	443295 130