


Garant

Cutting disc, high-performance version EXTRA THIN, steel, Disc Ø: 178 mm

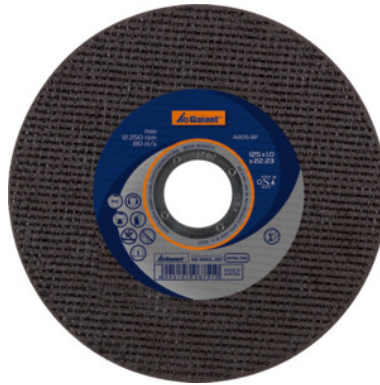

Order data

| | |
|--------------|---------------|
| Order number | 563262 178 |
| GTIN | 4045197967527 |
| Item class | 51M |

Description

Version:

New **high-performance version** using state of the art technology with significant productivity advantages and excellent cutting qualities. **Increased cutting performance** due to rough free-grinding side faces; **improved service life**.

The thinness of the disc allows **very quick** cutting **with low force and optimum time saving**.

Clean cut edges, virtually no burrs.

Special type for **steel**, high performance version.

Specification:

A46S-BF.

maximum circumferential speed: 80 m/s

Shape description: flat

Bore Ø: 22.23 mm

Shape description: flat

Disc thickness: 1.6 mm

Bore Ø: 22.23 mm

Technical description

| | |
|--------|----------|
| Bore Ø | 22.23 mm |
|--------|----------|

| | |
|-------------------------------|-------------------|
| Disc thickness | 1.6 mm |
| Shape description | flat |
| Shape | 41 |
| Specification | A46S-BF |
| maximum speed | 8500 rpm |
| Disc Ø | 178 mm |
| for material thicknesses | 7.7 mm |
| Grinding medium code | A |
| recommended approach angle | 90 degrees |
| optimised for material | HSS |
| Propulsive equipment | Angle grinders |
| maximum circumferential speed | 80 m/s |
| Type of product | Cutting-off wheel |