


LESSMANN®
THE GERMAN BRUSH COMPANY

Dished conical brush Alternating plaiting, stainless steel wire 0.50 mm, Brush Ø D1× thread M: 115XM14 mm

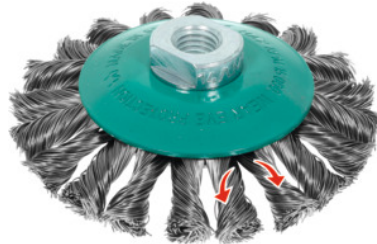

Order data

Order number	571355 115XM14
GTIN	4017359380154
Item class	57L

Description

Version:

Cranked **conical brush** with smooth wire 0.50 mm, **plaited** and firmly crimped into the steel body. **Very aggressive brushing effect with high wear resistance.**

Application:

Alternating plaiting sense (right / left) for increased aggressiveness for heavy-duty brushing work. Very suitable for use at corners and edges, with a smooth action.

Ideal for working where access is difficult and for heavy brush work, e.g. descaling, removing rust, removing paint, roughening, cleaning metal parts, also for cleaning formwork boards.

With **internal thread M14**, for direct mounting **on angle grinders.**

Thread M: M14

Bristle width L_1 : 12 mm

Length of brush section H_1 : 24 mm

Number of twisted knots: 20

maximum speed: 12500 rpm

Technical description

Number of twisted knots	20
Bristle thickness	0.5 mm
Brush Ø D_1	115 mm

maximum speed	12500 rpm
Length of brush section H ₁	24 mm
Bristle width L ₁	12 mm
Thread M	M14
Brush material	Stainless steel wire
Twisted knotting	Alternating plaiting
Type of product	Bevel brush