




IMPACT hexagon socket, 1/2 inch, thin-walled Surface Drive, Width across flats: 13 mm

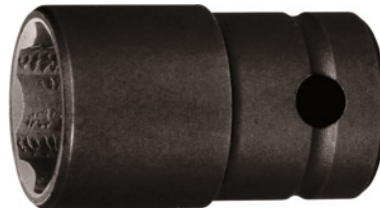

Order data

| | |
|--------------|---------------|
| Order number | 651020 13 |
| GTIN | 4045197336385 |
| Item class | 62D |

Description

Version:

Sturdy shape especially for use with electric or compressed air impact wrenches. With cross hole and snap ring groove for securing sockets. Internal square to DIN 3121.

For safety reasons must always be secured using a suitable locking pin and O-ring.

Advantage:

The surface drive profile grips the bolt on the faces and protects the weaker corners. This reliably prevents the socket jamming or damaging the bolt heads.

Material:

Chrome molybdenum steel, surface burnished.

Square drive: 1/2 inch

Ø drive output end: 19.2 mm

Length: 38 mm

Technical description

| | |
|--------------------|------------------------------|
| Length | 38 mm |
| Ø drive output end | 19.2 mm |
| Width across flats | 13 mm |
| Square drive | 1/2 inch |
| Drive profile | Hexagon socket Surface drive |

| | |
|-----------------|-----------------------------|
| Drive profile | Hexagon socket Surfacedrive |
| Type of product | Socket insert |

Accessories

| | |
|---|-------------|
| Retainer clip set, 10 pieces, for sockets, 1/2 inch, including extractor Type 3 | 651790 3 |
| "O" ring for sockets, 1/2 inch Ø 25 mm | 651800 25 |
| Locking pin for sockets, 1/2 inch Ø×Length 3X20 mm | 651900 3X20 |